

01-14-00

A

Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:

FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE

NEW YORK, NEW YORK 10151

TEL: (212) 588-0800

FAX: (212) 588-0500

Date: January 13, 2000Attorney Docket No.: 450117-02372

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office
of an application for patent in the name(s) of:

Besma KRAIEM

entitled:

QUASI-DIFFERENTIAL MODULATION/DEMODULATION METHOD FOR MULTI-AMPLITUDE DIGITAL
MODULATED SIGNALS AND OFDM SYSTEM

The following are enclosed:

- ☒ Specification (12 pages)
☒ 9 Sheet(s) of Drawings
☒ 15 Claim(s) (including 2 independent claim(s))
☐ This application contains a multiple dependent claim

- ☒ Our check for \$ 690.00, calculated on the basis of the claims as
amended by any enclosed preliminary amendment as follows:

Basic Fee, \$690.00 (\$345.00)	\$ 690.00
Number of Claims in excess of 20 at \$18.00 (\$9.00) each:	-0-
Number of Independent Claims in excess of 3 at \$78.00 (\$39.00) each:	-0-
Multiple Dependent Claim Fee at \$260.00 (\$130.00)	-0-
Total Filing Fee	\$ 690.00
Assignment Recording Fee \$40.00	-0-

- ☒ Oath or Declaration and Power of Attorney
☒ New ☐ signed ☒ unsigned
☐ Copy from a prior application (37 C.F.R. 1.63(d))

- ☐ Certified copy of each of the following application(s) to substantiate
the claim(s) for priority made in the Declaration:

Application No.FiledIn

Please charge any additional fees required for the filing of this
application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicant

William S. Frommer
 William S. Frommer
 Reg. No. 25,506

jc675 U.S. PTO
 09/482769
 01/13/00

FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE NEW YORK, NEW YORK 10151

WILLIAM S. FROMMER
WILLIAM F. LAWRENCE
EDGAR H. HAUG
MATTHEW K. RYAN
BARRY S. WHITE
THOMAS J. KOWALSKI
JOHN R. LANE
DENNIS M. SMID *
DANIEL G. BROWN
BARBARA Z. MORRISSEY
STEVEN M. AMUNDSON
MARILYN MATTHES BROGAN
JAMES K. STRONSKI

A. THOMAS S. SAFFORD
JEROME ROSENSTOCK
RAYMOND R. WITTEKIND, PH.D.

Of Counsel

GORDON KESSLER
MARK W. RUSSELL *
BRUNO POLITO
GRACE L. PAN *
JEFFREY A. HOVDEN
JOE H. SHALLENBURGER
CHRISTIAN M. SMOLIZZA
GLENN F. SAVIT
ROBERT E. COLLETTI
DEXTER T. CHANG
PETER J. WAIBEL *
LINDSEY A. MOHLE
DEENA P. LEVY

* Admitted to a Bar
other than New York

January 13, 2000

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: U.S. Patent Application
Applicant: Besma KRAIEM
Our Ref.: 450117-02372

Dear Sir:

Enclosed are papers constituting the above patent application which is being filed under 37 C.F.R. 1.53 without a signed Declaration. Please accord a filing date and a serial number to such application and inform the undersigned thereof so that a signed Declaration and the surcharge required by 37 C.F.R. 1.16(e) may be duly filed.

Please address all correspondence to:

William S. Frommer, Esq.
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Respectfully,



William S. Frommer
Reg. No. 25,506
Attorney for Applicant
Enclosures

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Besma KRAIEM
Filed : Herewith
For : QUASI-DIFFERENTIAL MODULATION/DEMODULATION METHOD
FOR MULTI-AMPLITUDE DIGITAL MODULATED SIGNALS AND
OFDM SYSTEM

745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

EXPRESS MAIL

Mailing Label Number EL375194215US
Date of Deposit January 13, 2000
I hereby certify that this paper or fee is being
deposited with the United States Postal Service
"Express Mail Post Office to Addressee" Service
under 37 CFR 1.10 on the date indicated above and
is addressed to the Assistant Commissioner for
Patents, Washington, D.C. 20231.

Charles J. Jickel
(Typed or printed name of person
mailing paper or fee)

Charles J. Jickel
(Signature of person mailing paper or fee)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Before the issuance of the first Official Action,
please amend the above-identified application as follows:

IN THE CLAIMS:

Please amend the claims as follows:

Claim 4, line 1, delete "at least one of the preceding
claims" and insert "--claim 1--";

Claim 13, line 1, delete "or 12";

Claim 14, line 1, delete "any one of the preceding
claims 10 to 13" and insert "--claim 10--".


REMARKS

The claims have been amended to eliminate multiple
dependencies. The filing fee has been calculated based upon
these amendments to the claims.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicant

By:


William S. Frommer
Reg. No. 25,506
Tel. (212) 588-0800

PATENT
450117-02372

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

TITLE: QUASI-DIFFERENTIAL
MODULATION/DEMODULATION METHOD FOR
MULTI-AMPLITUDE DIGITAL MODULATED
SIGNALS AND OFDM SYSTEM

INVENTOR: Besma KRAIEM

William S. Frommer
Registration No. 25,506
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

Description

- 1 The invention relates to a modulation/demodulation method for multi-amplitude digital modulated signals with non-equidistant phases transmitted via an orthogonal frequency division multiplexing (OFDM) communication channel and also refers to an OFDM system for the transmission of
5 information by multi-amplitude digital modulated signals from a transmitter to a receiver via a radio channel.

Orthogonal frequency division multiplexing (OFDM) has gained increasing interest in wireless communication systems during the last years, in particular
10 for DAB (Digital Audio Broadcast) and DVB-T (Digital Video Broadcast Television). It has been considered for transmitting high data rate over frequency selective radio channels.

The principle of OFDM transmission technique is to devise an available
15 bandwidth into several subchannels with smaller bandwidths. Thus the symbol length increases and the inter symbol interference (ISI) is combated. On the other hand, each subchannel is considered to be frequency non-selective. The amplitude and phase distortion caused by multipath effects is accordingly described by one factor.

20 In coherent transmission systems that distortion is removed by channel estimation. For this purpose known symbols are sent on pilot subcarrier(s). On the receiver side the amount of channel distortion is processed from the received known symbols and is used to correct the rest of the data before
25 demodulation.

Channel estimation is not required, if differential modulation is used. The information is encoded in the ratio of successive symbols on the same subcarrier. Thus, the channel distortion is cancelled at the receiver, since it is
30 assumed to be constant during successive OFDM symbols.

However, differential modulation and demodulation have been only described for low-order single-amplitude modulation schemes, such as PSK (Phase-Shift Keying) and QPSK (Quadrature Phase-Shift Keying). As for a specific example, reference is made to document DE 195 40 250 C1 describing a demodulation

1 scheme based on the assumption that the demodulated complex symbols are
associated to respectively transmitted symbols via a rotational symmetric
constellation diagram so that approximative estimations for the phase-shift
lead to applications with reasonable results.

5

For multi-amplitude signals such as QAM (Quadrature Amplitude Modulation)
only coherent modulation is used, and thus channel estimation is always
required (see e.g. EP 0 734 132 A2).

10 It is an object of the present invention to teach a more simple modulation/
demodulation method and system for multi-amplitude digital modulated
signals with non-equidistant phases, in particular QAM signals transmitted via
an OFDM communication channel without the necessity of using pilot carriers.

15 According to the teaching and the characterizing features of claim 1, this
problem is solved with the idea that the amplitudes of said digital modulated
signals should be separately and coherently processed, whereas for the phases
of respectively subsequent symbols on the same subcarrier differential
modulation and demodulation is provided.

20

Advantageous details, improvements and embodiments are the subject of
dependent claims.

25 An orthogonal frequency division multiplexing (OFDM) system for the trans-
mission of information by multi-amplitude digital modulated signals from a
transmitter to a receiver via a radio channel in accordance with the invention
is the subject-matter of and defined in claim 9. Specific embodiments and
advantageous supplements and improvements are defined in further dependent
claims.

30

For a comprehensive explanation of the invention the following description is
divided in chapters.

In **Chapter I** the OFDM transmission model used for simulations and the
35 channel models are first described.

1 In **Chapter II** the simulation of coherent modulated 16 QAM is presented.

In **Chapter III** the principle of the combined coherent/differential (henceforward called quasi-differential) modulation for 16 QAM signals is
5 described as well as the way it was implemented according to a best mode presently known.

In **Chapter IV** the simulation results of both techniques are compared in terms of BER (Bit Error Rate) performance in an AWGN (Additive White Gaussian
10 Noise) channel and in a multipath channel.

Finally as a **Summary** a brief comparison of both systems with respect to implementation complexity will conclude the present description of the invention.

15 In the following description reference will be made to the accompanying drawings in which

Fig. 1
20 is a block diagram of an OFDM system with features according to the invention;

Fig. 2 is a diagram of the BER performance of coherent 16 QAM signals in an AWGN channel and multipath channel,
25 respectively;

Fig. 3 is a constellation diagram of 16 QAM symbols before and after phase-differential encoding;

30 **Fig. 4** depicts a block diagram implementation of a quasi-differential phase encoder (transmitter side);

Fig. 5 is a block diagram of the implementation of a quasi-differential phase decoder (receiver side);

35 **Fig. 6** shows a data frame structure as used for simulations;

-
- 1 **Fig. 7** is a diagram of the BER performance of quasi-differential 16 QAM signals in AWGN and multipath channels, respectively;
- 5 **Fig. 8** visualizes a diagram of a BER performance comparison of coherent and quasi-differential 16 QAM in an AWGN channel;
- Fig. 9** is the diagram of a BER performance comparison of coherent and quasi-differential 16 QAM signals in multipath channels; and
- 10
- Fig. 10** shows constellation diagrams of received QPSK and 16 QAM signals at different stages with an assumed SNR (Signal-to-Noise Ratio) of 35 dB wherein
- 15
- **Fig. 10A** visualizes received QPSK signals in a multipath channel;
 - **Fig. 10B** is a plot of received 16 QAM signals in a multipath channel;
 - 20 - **Fig. 10C** shows the stage of received QPSK signals after differential phase decoding;
 - **Fig. 10D** is a Q/I plot of received 16 QAM signals after differential phase decoding;
 - 25 - **Fig. 10E** depicts a plot of received QPSK signals after passing a hardlimiter on the receiver side; and
 - 30 - **Fig. 10F** represents a Q/I plot of received 16 QAM signals after amplitude correction.

Chapter I: System Simulations

- 35 In order to evaluate both the coherent transmission scheme and the quasi-differential transmission scheme according to the invention in different environments a baseband simulation tool known under the tradename COSSAP

1 has been used.

The OFDM transmission model used for such simulations is shown in Fig. 1. Briefly, this OFDM system works as follows: The uncoded data stream is first
 5 modulated in 16 QAM symbols. Then $(N - N_{\text{sel}})$ virtual carriers (N = maximum carriers for FFT; N_{sel} = selected carriers) are inserted in the band edges of each OFDM symbol, since they are not used to transmit data. After IFFT (Inversed Fast Fourier Transformation) is processed, a guard interval is inserted at the beginning of each OFDM symbol, containing a copy of its last
 10 N_G samples (N_G = Samples of guard length).

The blocks of Fig. 1 and their respective function are briefly described in the following:

15 **Transmitter side** (upper part of Fig. 1):

	Reference Number:	Description and Function:
20	1	Demultiplexer: The adopted frame structure consists of n QPSK symbols followed by m 16 QAM symbols. Thus $(n \cdot 2)$ bits are sent to the QPSK modulator 2, and $(m \cdot 4)$ bits are supplied to a 16 QAM modulator 3.
25	2	QPSK Modulator: Mapping of 2 bits into QPSK complex symbols.
	3	16 QAM Modulator: Mapping of 4 bits into 16 QAM complex symbols.
30	4	Multiplexer (MUX): Multiplexes QPSK and 16 QAM symbols into a frame, as shown in Fig. 6.
35	5	Phase-Differential Encoder: The phases of subsequent symbols on the same subcarrier are differentially modulated, whereas the amplitude is kept unchanged (see functional block diagram of Fig. 4).

1	6	Null Symbol Generator: The unused subcarriers at the band edges are set to zero.
5	7	MUX: The data and null symbols are multiplexed into an OFDM symbol, where the subcarriers at the edges are equal to zero.
10	8	IFFT: Inverse FFT is performed on N data samples to produce a baseband OFDM modulated signal.
15	9	Insertion of guard interval: A copy of the last N_G samples of the time domain OFDM symbol are inserted before each symbol in order to reduce the effect of multipath interference.
20	10	Quadrature Modulator: The input signal is used to modulate carriers having a 90° phase difference.
25	11	Digital-to Analogue converter (D/A-converter).
	12	Up-Converter: The signal is converted by a frequency converter to a given carrier frequency for transmission.
	13	Radio Channel: The radio channels used for simulations are described further below in this chapter.

Receiver side (lower part of Fig. 1):

30	14	Down-Converter: The received signal is converted from the carrier frequency down to an intermediate frequency.
35	15	Analogue-to-Digital converter (A/D-converter).

1	16	Quadrature Demodulator: The OFDM signal is detected from the intermediate frequency and the baseband signal is generated.
5	17	Time Synchronization: A FFT window is generated indicating the effective symbol portion of the OFDM symbol for removing the guard interval.
10	18	FFT: Fast (discrete) Fourier Transformation is performed on the OFDM symbol to generate the complex frequency-domain symbols.
15	19	Demultiplexer (DEMUX): The input signal is demultiplexed into the useful data to be sent to a phase differential decoder 21 and the unused subcarriers at the band edges are removed in 20.
20	20	Delete unused subcarriers: The null symbols inserted by null symbol generator 6 at the transmitter are removed and deleted.
25	21	Phase Differential Decoder: The phases of subsequent symbols on the same subcarrier are differentially demodulated, whereas the amplitude is coherently processed (see block diagram implementation of Fig. 5).
30	22	DEMUX: According to the frame structure QPSK symbols are sent to a hardlimiter 23 and a running mean amplitude generation means 24 and the following QAM symbols are amplitude-corrected in 25.
35	23	Hardlimiter: The received QPSK symbols are hard-limited before demodulation.

- 1 **24** Running mean of amplitude: Since the amplitude of the QPSK symbols is definitely "1", the amount of amplitude distortion each subcarrier is determined from the QPSK signal, and supplied to block 25 for correction of the amplitude of the QAM symbols.
- 5
- 25** Correction of amplitude: The amplitude of the received QAM symbols is corrected by the factor calculated by block 24.
- 10
- 26** QPSK Demodulator: Demapping of QPSK complex symbols into corresponding bits.
- 27** 16 QAM Demodulator: Demapping of QAM complex symbols into corresponding bits.
- 15
- 28** MUX: Multiplexing of QPSK and QAM bits according to the adopted frame structure.
- 20 Two channel models have been considered for simulation: An additive white Gaussian noise channel (AWGN) and a frequency selective channel model proposed by ETSI (European Telecommunications Standards Institution) for the Universal Mobile Telecommunication System (UMTS). The latter is a Wide Sense Stationary Uncorrelated Scattering (WSSUS) channel model, that assumes that the received signal is represented by the sum of six delayed replicas of the input signal, weighted by independent zero-mean complex Gaussian time variant processes. The relative path loss and delay of each path for typical indoor environment is given in the Table 1 below:
- 25

- 30
- | Tap | Relative Delay
(nsec) | Average Path
Loss (dB) |
|-----|--------------------------|---------------------------|
| 1 | 0.0 | 0.0 |
| 2 | 50 | -3.0 |
| 3 | 110 | -10.0 |
| 4 | 170 | -18.0 |
| 5 | 290 | -26.0 |
| 6 | 310 | -32.0 |
- 35

Table 1: Parameter of the multipath channel model used for simulations

- 1 On the receiver side the guard interval is first removed by windowing. The synchronization is not considered here. After the signal has been transformed into the frequency domain by FFT, the virtual carriers are extracted and the QAM demodulation is performed.

5

For the analysis the following system parameters have been used:

	FFT carrier size:	$N = 64$
	Guard length:	$N_G = 7$ samples
10	Useful time:	$N_{\text{used}} = 64$ samples
	Symbol time:	$N_{\text{Sym}} = 71$ samples
	Selected carriers:	$N_{\text{sel}} = 56$
	Sampling frequency:	$B = 30$ MHz

15 **Chapter II: Coherent Modulation**

- As mentioned above, in the case of coherent modulation pilot symbols should be inserted to help channel estimation in the receiver. Normally, each frame contains a number of pilot symbols on different subcarriers. In the receiver the amount of distortion of the pilot subcarriers is interpolated in the time and frequency domains, in order to estimate the channel response over the frequency band of interest.

- To simplify simulations it was assumed that one OFDM symbol with all subcarriers set to a known value ($I = 1$, $Q = 0$) is sent at the beginning of each frame. On the receiver side that OFDM symbol is first filtered using a complex FIR filter, in order to shorten the effect of additive white Gaussian noise. It is then used as a measure of channel distortion and the following data symbols are correlated by equivalent factors. The simulation results over AWGN and UMTS channels are shown in Fig. 2:

- Curve "a" shows an ideal demodulation condition for AWGN. Curve "b" visualizes the coherent demodulation of 16 QAM signals over an AWGN channel causing a SNR degradation of about 1dB at a BER of $10E-3$. This is due to the fact that the channel estimation factor for every subcarrier is gained from a noisy pilot symbol in spite of FIR filtering. Further SNR degradation of about 2,5 dB is observed, when a multipath channel UMTS is assumed (curve "c").

- 1 These results can be improved by averaging the channel estimation factors over several frames, thus the effect of additive white Gaussian noise can be further shortened.

5 **Chapter III: Quasi-Differential Modulation according to the Invention.**

- The reason why quadrature amplitude modulated (QAM) signals can not be differentially processed as with DQPSK is the multi-amplitude constellation of QAM signals. The result would be endless many amplitude levels after a few
10 symbols have been differentially modulated. This is, however, an undesired property that complicates the implementation.

- Thus the idea of the invention is the separate handling of amplitude and phase of QAM signals. If only the phase of 16 QAM symbols are differentially modu-
15 lated while keeping their original amplitudes, there would be endless many phase levels at three amplitudes (see Fig. 3). Of course, this is less bothersome than it is the case with many amplitude levels.

- As shown in Fig. 4 and Fig. 5 the phases of subsequent symbols ϕ_k and $\phi_k - N$,
20 respectively on the same subcarrier are differentially modulated and demodulated, whereas the amplitude A_k is coherently processed.

- The phase rotation on every subcarrier is no more relevant. Preferably and in accordance with the invention the amplitude distortion of the QAM signal due to frequency selectivity of the channel is separately corrected. The information
25 about the correcting factor for every subcarrier is preferably taken from the QAM symbols whose phase is unique to them. This is the case for all symbols not located at the diagonals of the Q/I diagram. In particular, this is the case for 8 of the 16 symbols as shown in the constellation diagram of Fig. 10D.
30 Constellation diagrams for QPSK and 16 QAM symbols at different stages with an assumed SNR of 35 dB are depicted in Fig. 10A to 10F with the respective signal characterization indicated in the respective headline.

- The correcting factors for the amplitude can be easier computed when a
35 combined QPSK/16 QAM system is adopted. Often, wireless broadband systems adopt QPSK modulation of control data, for better robustness in frequency selective channels, and 16 QAM or higher modulation for useful

1 data. In the system used for simulation, the frame structure of Fig. 6 has been adopted comprising 200 OFDM symbols in the QPSK modulated control signal and 4800 OFDM symbols in the 16 QAM modulated data signal, i.e., one frame contains 5000 OFDM symbols.

5

Since QPSK symbols have definitely the amplitude "1", and the channel is supposed to be static during one frame, the amount of amplitude distortion of the QPSK signal can be easily determined and used for correction of the QAM signal.

10

Furthermore, a running mean of the amplitude correcting factor can be performed during the QPSK transmission, in order to shorten the effect of additive white Gaussian noise.

15 If only 16 QAM signals are available, a running mean of the correcting factors can also be performed over a time window, where the channel is supposed to be static.

Quasi-differential demodulation in an AWGN channel causes a SNR degradation of about 5.5 dB at a BER of $10E-3$; see Fig. 7, curve "f" - compared to curve "d" referring to an ideal AWGN channel. The BER performance over a multipath channel UMTS is identical with that over an AWGN channel as visualized by curve "e" in Fig. 7. This denotes, that the multipath effect is fully shortened with the quasi-differential demodulation technique according to the invention.

25 The benefit of this new technique is therefore major in frequency-selective radio channels.

Chapter IV: Comparison of BER performance

30 The BER results of both techniques are depicted in Fig. 8 for AWGN and in Fig. 9 for the multipath channel.

Fig. 8 teaches that coherent modulation technique with channel estimation performs considerably better than the quasi-differential modulation over the AWGN channel. Curve "h" for the coherent modulation comes close to the ideal curve "g" by approximately 1 dB, whereas curve "j" for the quasi-differential technique shows a smaller decrease of BER as SNR increases.

35

- 1 However, the excellent performance of the 16 QAM quasi-differential modulation technique according to the invention becomes obvious when considering the multipath channel situation shown in Fig. 9. Curve "k" again shows for comparison the ideal situation for AWGN. The SNR degradation of curve "m"
- 5 depicting the BER performance for quasi-differential demodulation according to the invention compared to the coherent demodulation of curve "e" is most at a BER of $10E-3$, and amounts to only 2 dB. For higher and lower BERs the degradation becomes constantly smaller.

10 Chapter V: Summary

A novel incoherent demodulation technique for QAM signals has been presented. The BER performance of this technique has been analyzed and compared to the coherent one.

15

It can be concluded that the advantage of the coherent demodulation is the SNR gain of maximum 2 dB at a BER of $10E-3$. However, this can be further minimized when the additional overhead for channel estimation is used for higher coding of the quasi-differential modulated signal.

20

Furthermore, when considering the implementation aspects of both techniques compared here, it should be noticed that the differential technique according to the invention is less complex since the frequency synchronization of differential demodulated signals is easier. In particular, complex equalizers to

25 perform channel estimation are no more needed as for coherent systems. Also, no pilot subcarriers are needed and thus the bandwidth efficiency is much higher.

30

35

Claims

- 1 **1.** A modulation/demodulation method for multi-amplitude digital modulated signals with non-equidistant phases transmitted via an orthogonal frequency division multiplexing (OFDM) communication system **characterized in that** the amplitude of said signals are separately and coherently processed,
- 5 whereas the phases of respectively subsequent symbols on a same subcarrier are differentially modulated and demodulated, respectively.
- 2.** The method of claim 1, **characterized in that** said amplitudes are coherently transmitted and are corrected in the receiver.
- 10 **3.** The method of claim 2, **characterized in that** at the demodulation stage the amplitude distortions of said multi-amplitude digital modulated signals due to frequency selectivity of the respective channel are separately corrected on each subcarrier.
- 15 **4.** The method according to at least one of the preceding claims, **characterized in that** said multi-amplitude digital modulated signals are quadrature amplitude modulated (QAM) signals.
- 20 **5.** The method according to claim 4, **characterized in that** the correction factor for every subcarrier is determined from those QAM symbols whose phase is unique to them.
- 6.** The method of claim 4, **characterized in that** the correction factors for
- 25 the subcarrier amplitudes of said QAM symbols are computed from quadrature phase shift keying (QPSK) signals combined in one respective frame of a plurality of OFDM symbols comprising a defined number of QAM data symbols and a defined number of QPSK control signals.
- 30 **7.** The method according to claim 4, **characterized in that** sixteen QAM symbols are adopted as said QAM signals.
- 8.** The method of claim 7, **characterized in that** for amplitude correction of the receiver, a running mean of the correction factor is performed over a defined time window.

1 **9.** The method of claim 4, **characterized in that** a frame structure is
adopted comprising nQPSK symbols followed by m 16 QAM symbols.

5 **10.** An orthogonal frequency division multiplexing (OFDM) system for trans-
mission of a multi-amplitude digital modulated signal from a transmitter to a
receiver via a radio channel **characterized in that**

- on the transmitter side, phase differential encoder means (5) are
provided for differentially modulating subsequent symbols on the same
subcarrier,

10 - on the receiver side, differential phase decoding means (21) are
provided for demodulating said respectively subsequent symbols on said same
subcarrier, and in that

- means are provided on said both sides for coherent processing of the
amplitudes of said signals.

15 **11.** The OFDM system of claim 10, **characterized in that** said transmitter is
adapted to process a coded data stream with a block frame structure
consisting in each frame of a sequence of n quadrature phase shift keyed
(QPSK) control symbols followed by m sixteen quadrature amplitude modulated
20 (16 QAM) data symbols and comprising

- a demultiplexer means (1) for separating said control symbols and said
data symbols, and

- for feeding said control signals to QPSK modulator means (2) for
mapping of two bits each into QPSK complex symbols and for supplying said
25 data symbols to a 16 QAM modulator means (3) for mapping of four bits each
into 16 QAM complex symbols,

- first multiplexing means (4) for multiplexing said QPSK complex
symbols and said 16 QAM complex symbols and for supplying the resulting
data stream to

30 - a phase differential encoder means (5) for differential modulation of the
phases of respectively subsequent symbols on a same subcarrier and keeping
the respective amplitudes of said symbols unchanged,

- second multiplexing means (7) for transferring the resulting data
symbol stream into OFDM signals that are subject to an inverse fast Fourier
35 transformation (8) to produce a baseband OFDM-modulated signal,

- quadrature modulator means (10) for modulating said baseband signal
with carriers having 90° phase difference and supplying the thus modulated

1 signal to

- D/A-converter means (11) followed by an up-converter means (11) to hook the analog D/A-converter output signal to a given carrier frequency for transmission.

5

12. The OFDM system of claim 11, **characterized in that** null symbol generating means (6) are provided for setting unused subcarriers leaving said phase differential encoder means (5) at the band edges to zero.

10 13. The OFDM system of claim 11 or 12, **characterized in that** for reducing multipath interference effects a guard interval inserting means (9) is provided for inserting before each symbol a copy of a defined number of the last samples of the inverse fast Fourier transformed time domain OFDM symbols.

15 14. The OFDM system of any of the preceding claims 10 to 13, **characterized in that** said receiver is adapted to receive, process and demodulate said radio channel transmitted signal and comprising:

- a down-converter means (14) for converting the received signal from said carrier frequency down to an intermediate frequency;

20 - analogue-to-digital converter means for digitizing said intermediate frequency signal;

- a quadrature demodulator means (16) for detecting and generating a baseband signal from said A/D-converted intermediate frequency;

25 - a time synchronizing means (17) for generating a window for fast Fourier transformation indicating the effective symbol portion of the OFDM signal;

- fast discrete Fourier transformation means (18) for producing complex frequency domain symbols of said effective symbol portion of the OFDM signal;

30 - first demultiplexer means (19) for demultiplexing the FFT transformed OFDM signal into useful data and for cancelling unused subcarriers at the band edges;

- phase differential decoder means (21) for demodulating the phases of subsequent symbols on the same subcarrier with simultaneous coherent processing of the amplitudes;

35 - second demultiplexer means (22) for separating QPSK symbols and QAM symbols;

- QPSK demodulator means (26) for demapping of said QPSK complex

1 symbols into corresponding bits;

- QAM demodulator means (27) for demapping of said QAM complex symbols into corresponding bits; and

5 - third multiplexing means (28) for multiplexing of said demodulated QPSK bits and said demodulated QAM bits according to the adopted frame structure.

15 **15.** The OFDM system of claim 14, **characterized in that** the QPSK complex symbols output from said second demultiplexer means (22), on the one hand, are sent via hardlimiter means (23) to said QPSK demodulator means (26) and, on the other hand are sent to an amplitude distortion determining mean for generating a running mean of the respective QPSK signal, and in that the QAM complex symbols output by said second demultiplexer means (22) is supplied to an amplitude correction means (25) for amplitude correction according to the respective running mean of amplitude before supplying the amplitude corrected QAM complex symbols to said QAM demodulator means (27).

20

25

30

35

Abstract**Quasi-Differential Modulation/Demodulation Method for
Multi-Amplitude Digital Modulated Signals and OFDM System**

The invention proposes the separate processing of the phase and amplitude of multi-amplitude digital modulation techniques, such as a QAM. The phases are differentially modulated and the amplitudes coherently processed. Also proposed is a method to correct the amplitude distortion of the symbols on each subcarrier, either from the QAM signal itself or from any PSK signal, if available. The invention shows that differential modulation/demodulation of multi-amplitude signals with no equidistant phases such as QAM is possible. Complex equalizer means to perform a channel estimation is no more needed as for coherent systems. Further, no pilot subcarriers are needed, thus the bandwidth efficiency is much higher. Furthermore, the frequency synchronization of differential demodulated signals is less complex. An implementation proposal of the new modulation/demodulation technique is described.

(Fig. 1)

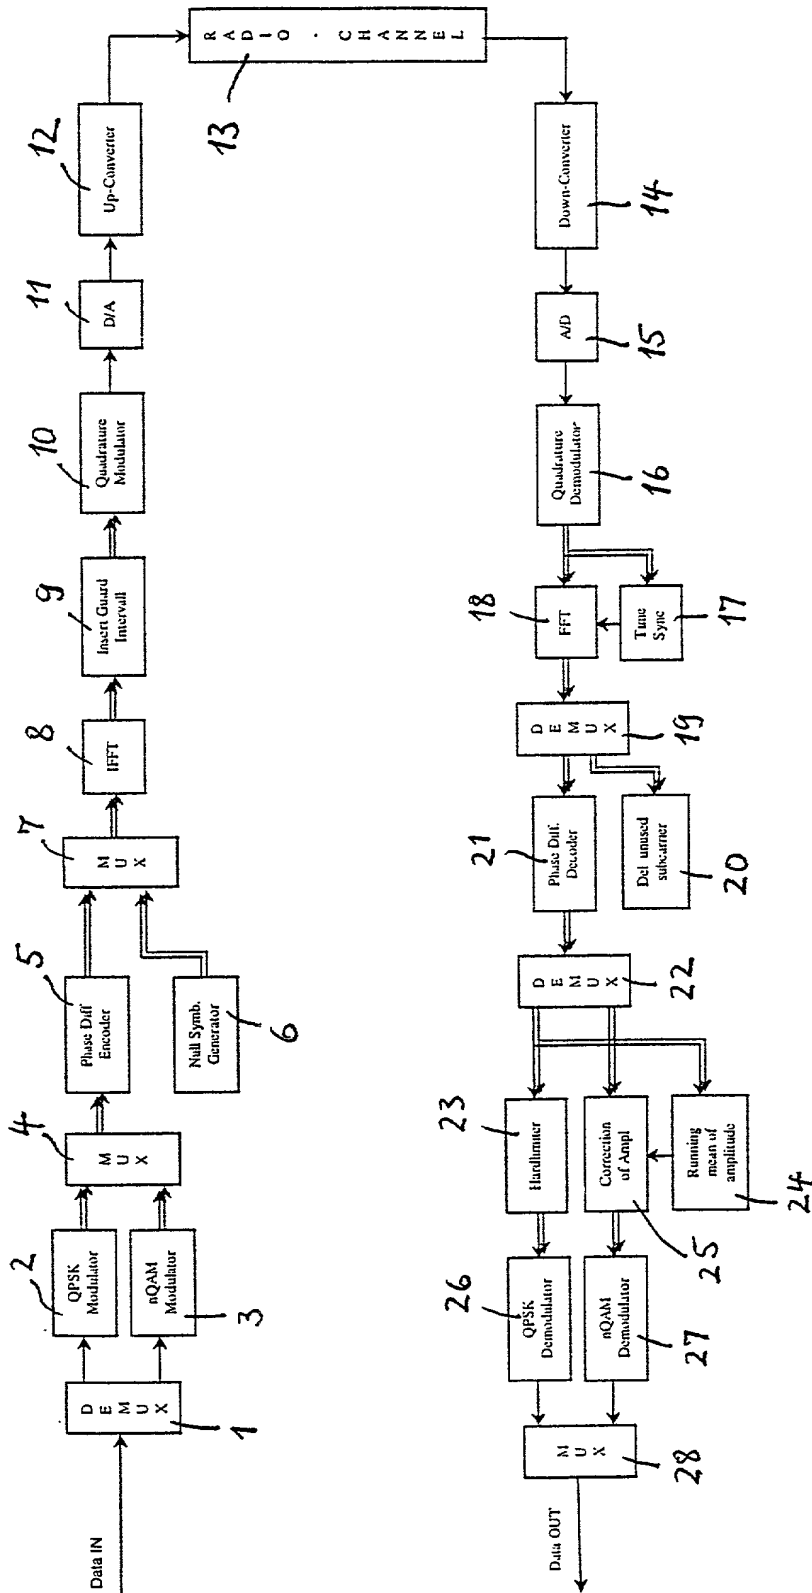


Fig. 1

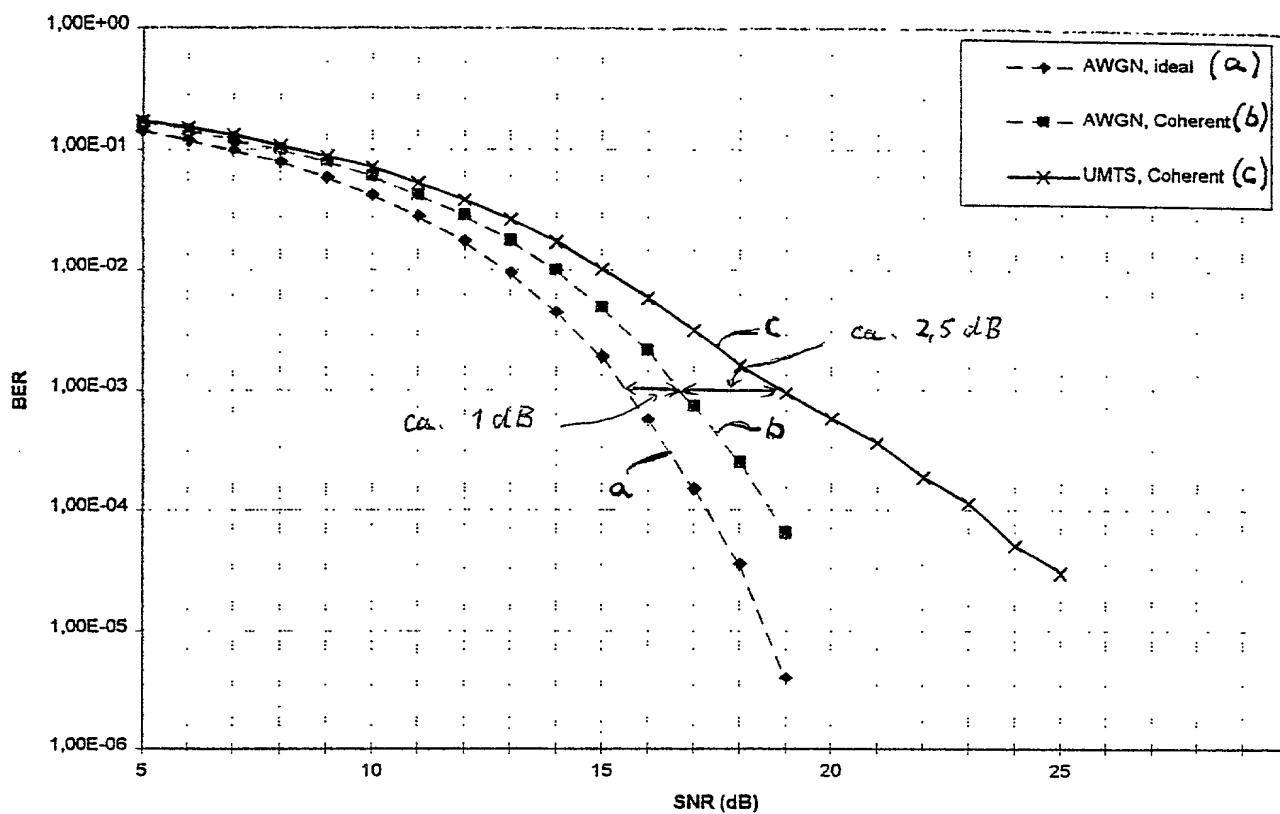


Fig. 2

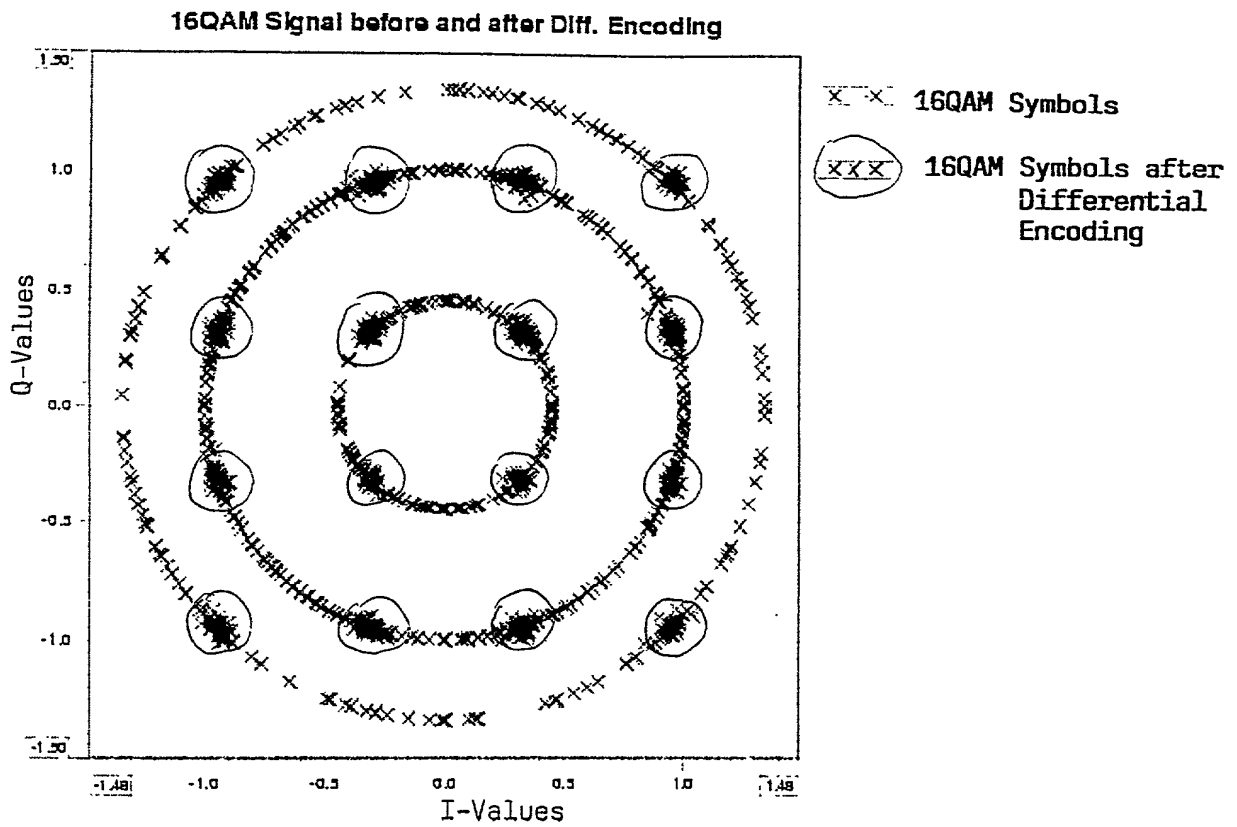


Fig. 3

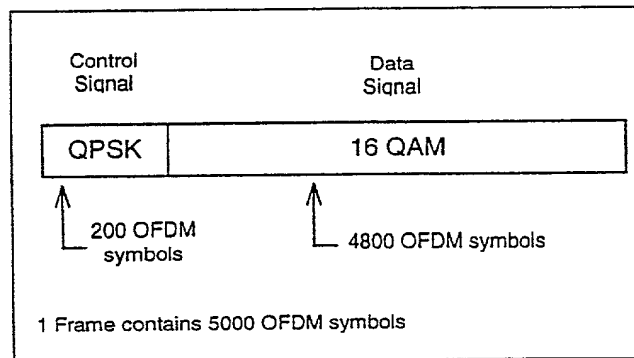


Fig. 6

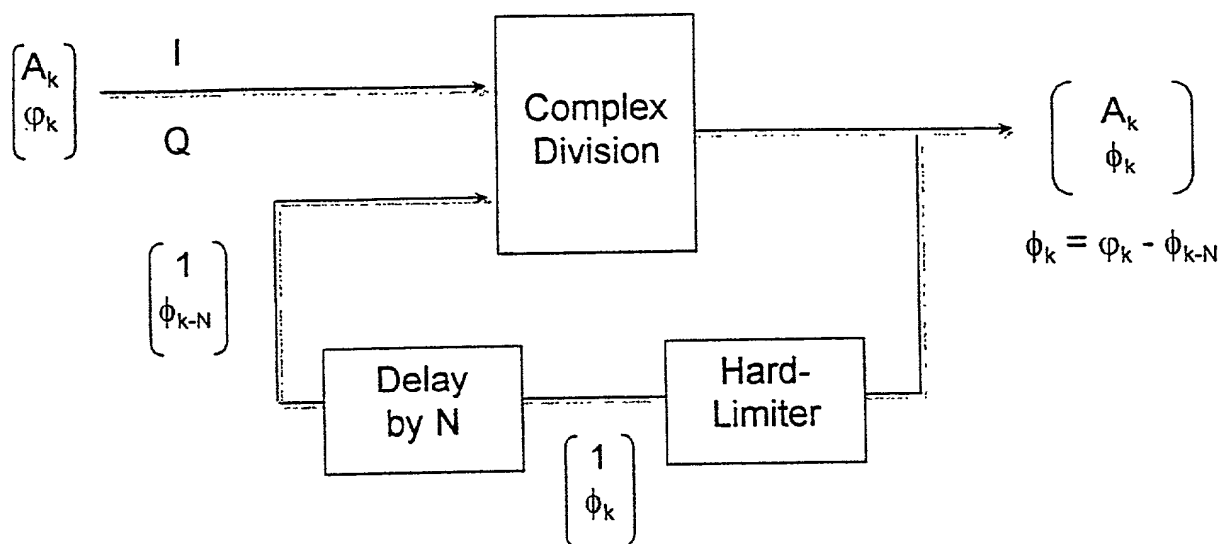


Fig. 4

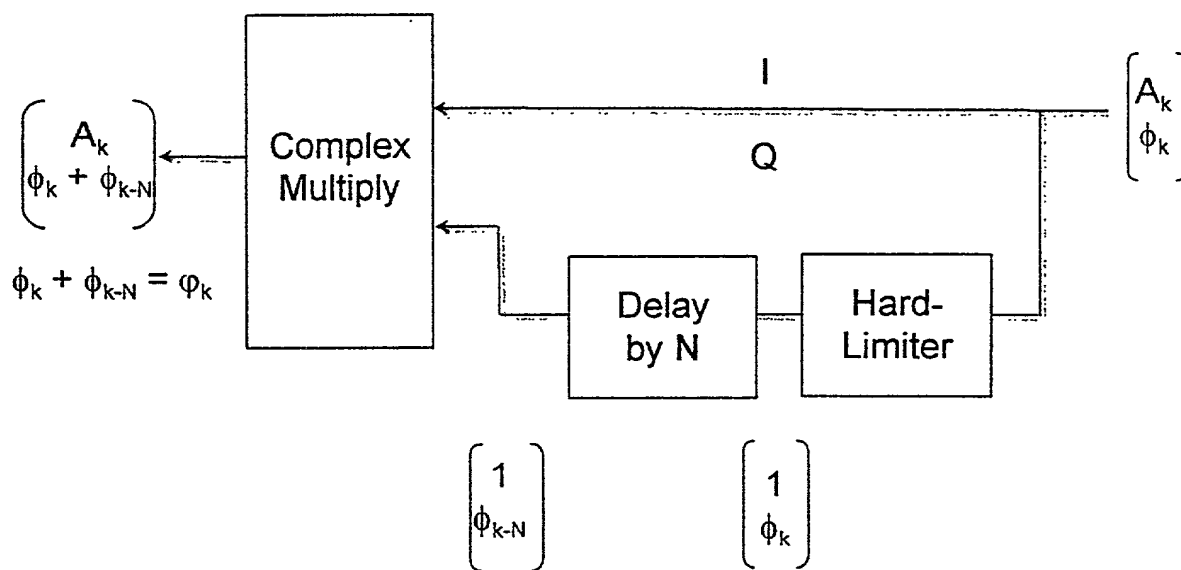


Fig. 5

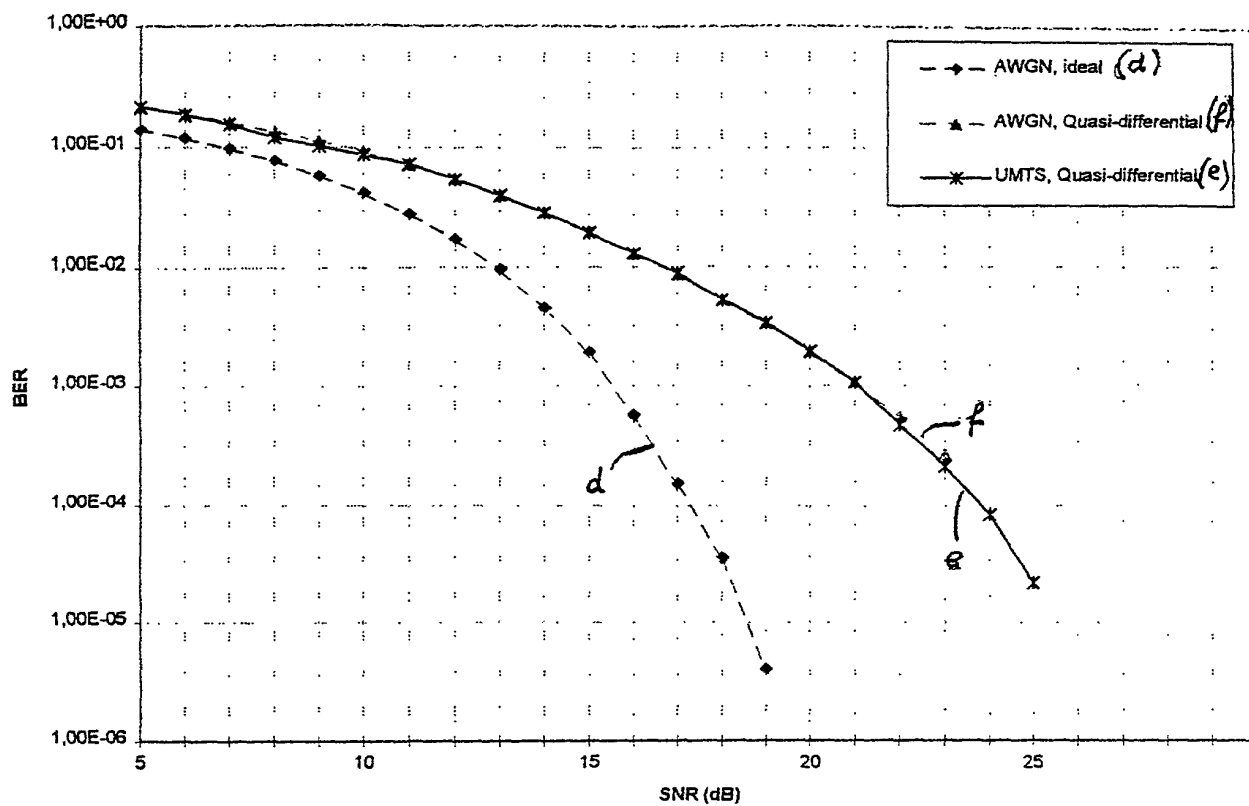


Fig. 7

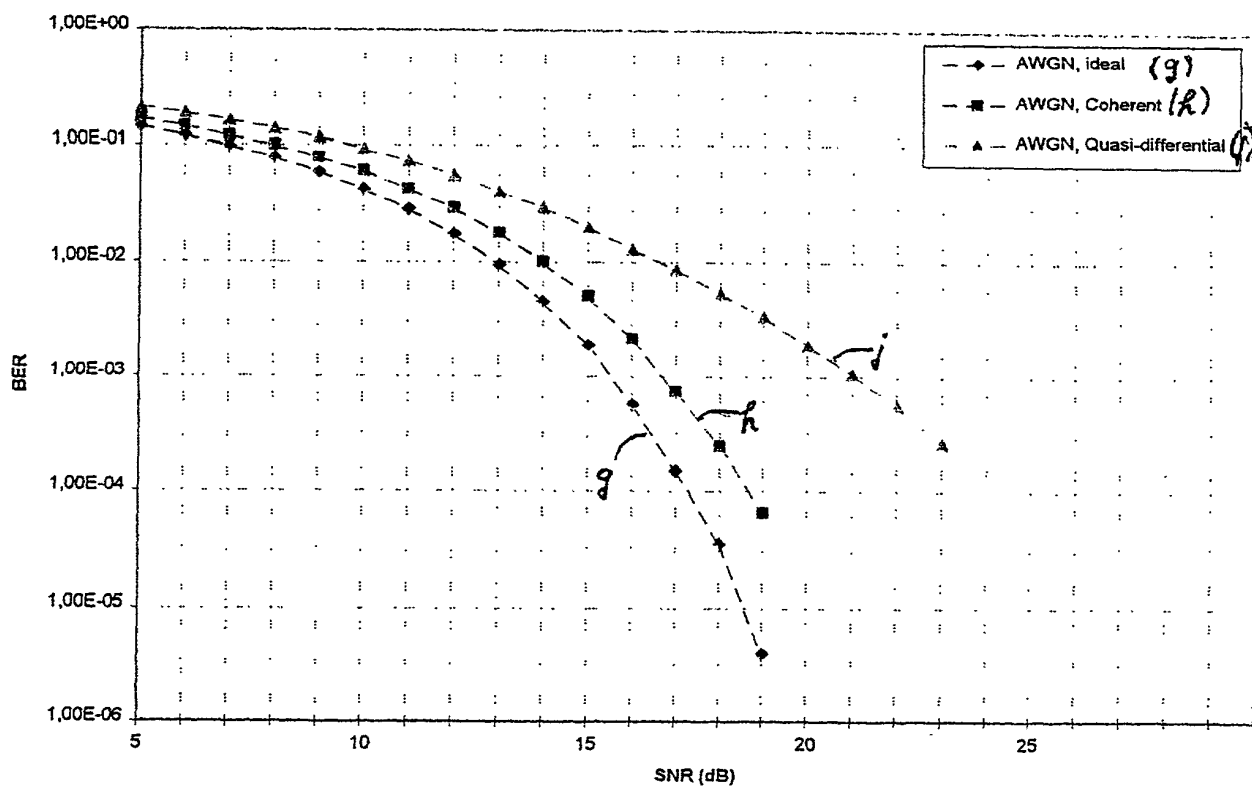


Fig. 8

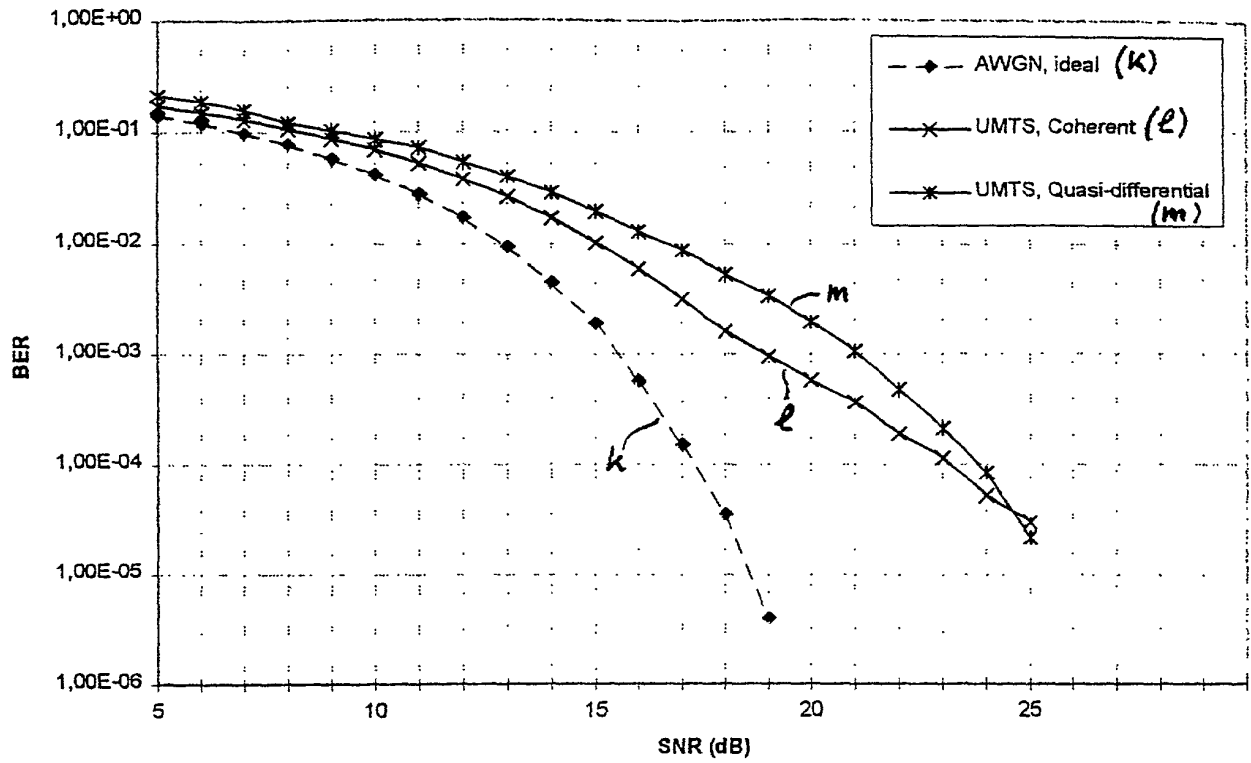


Fig. 9

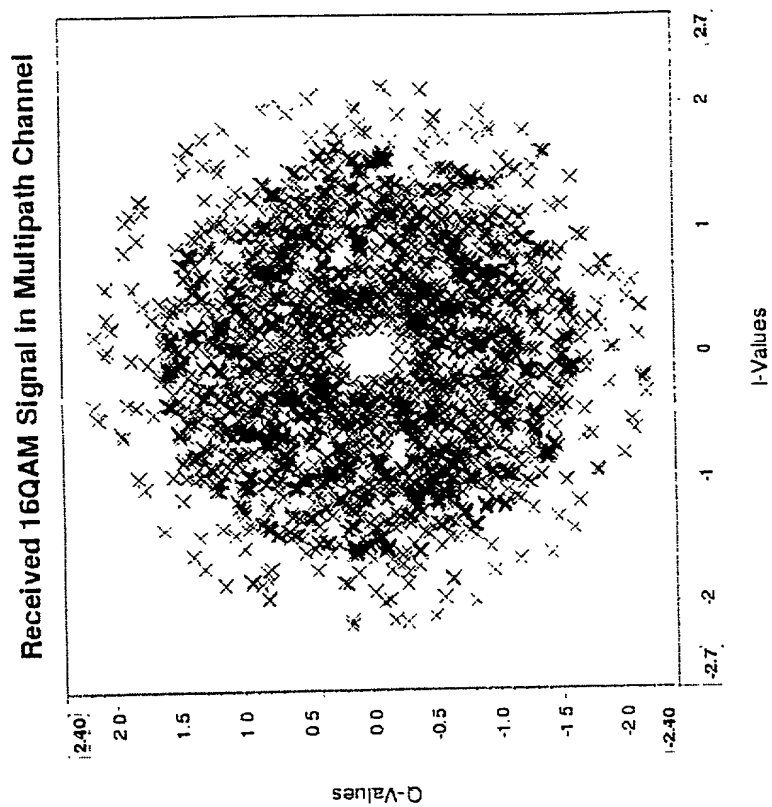


Fig. 10 B

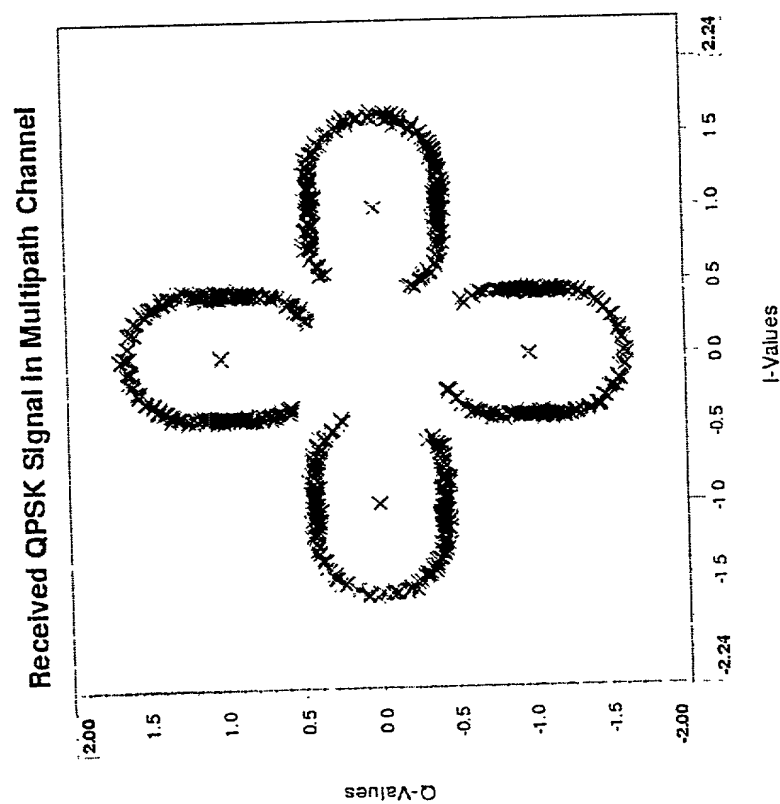


Fig. 10 A

Received QPSK Signal after Diff. Phase Decoding

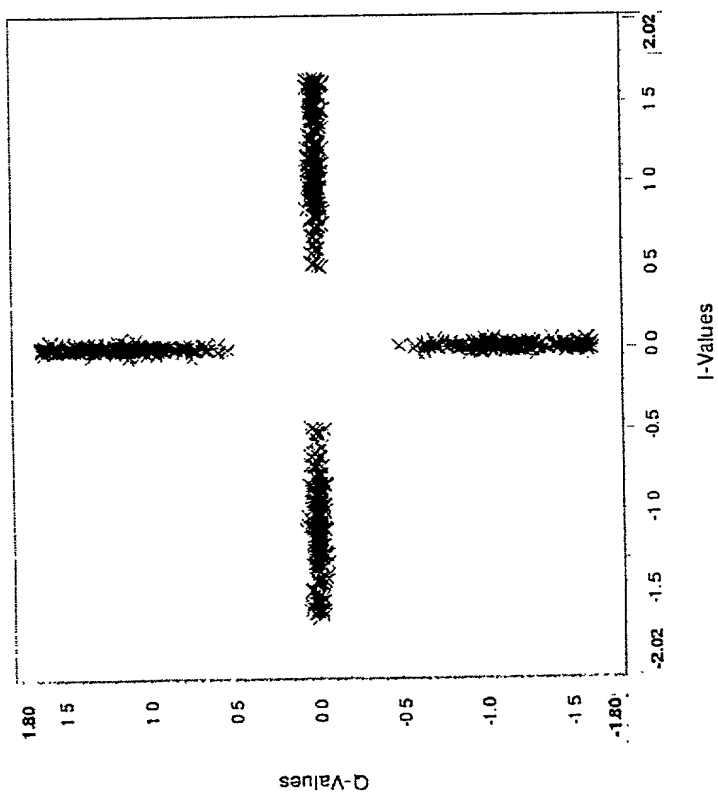


Fig. 10C

Received 16QAM Signal after Diff. Phase Decoding

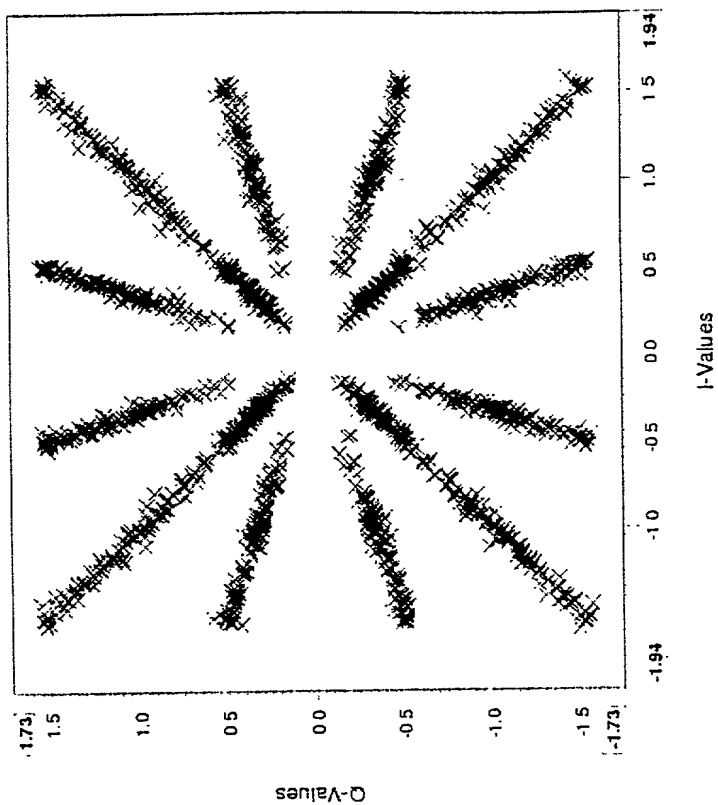


Fig. 10D

Received QPSK Signal after Hardlimiter

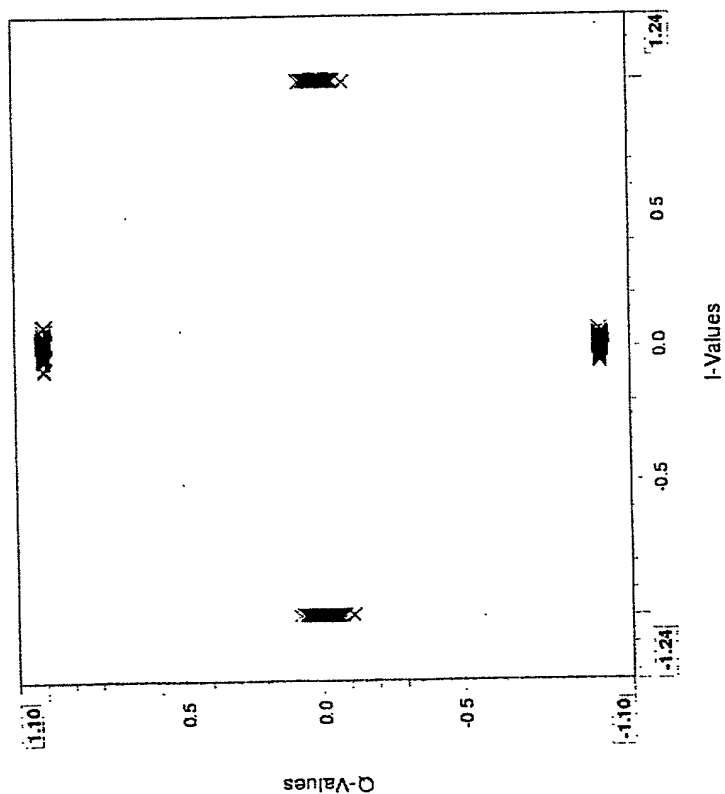


Fig. 10E

Received 16QAM Signal after amplitude correction

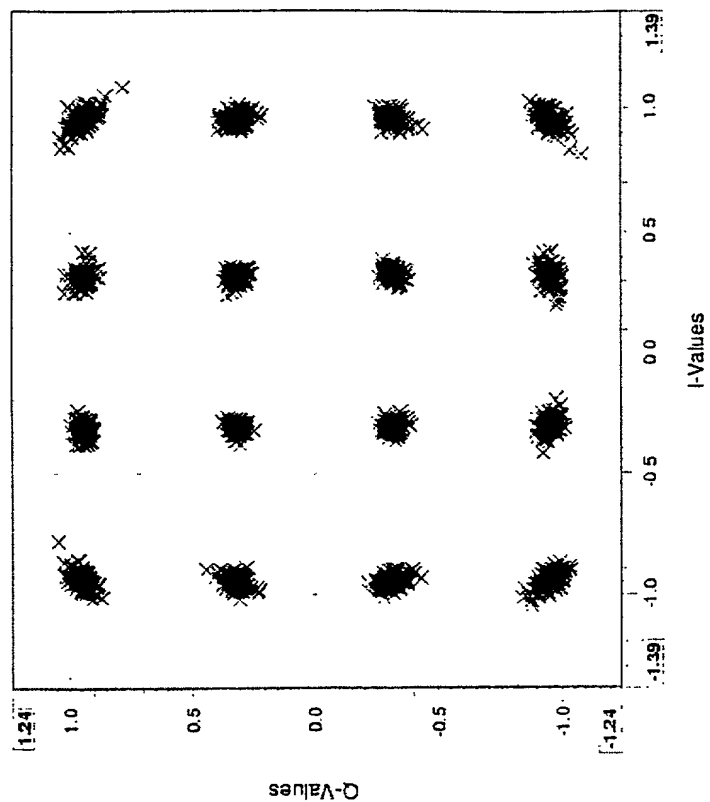


Fig. 10F

FROMMER LAWRENCE & HAUG LLP

As a below named inventor, I hereby declare that:
My residence, post office address and citizenship are as stated below next to my name,
I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

the specification of which

X is attached hereto.

was filed on _____ as Application Serial No. _____

with amendment(s) through _____ (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) [list additional applications on separate page]: Priority Claimed:

<u>Number:</u>	<u>Country:</u>	<u>Filed (Day/Month/Year):</u>	<u>Yes</u>	<u>No</u>
99100737.8	Europe	15 January 1999	X	

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s) [list additional applications on separate page]:

Appln. Ser. Number: Filed (Day/Month/Year): Status (patented, pending, abandoned):

I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 34,930 or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:

WILLIAM S. FROMMER, Esq.
c/o FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Direct all telephone calls to:
(212) 588-0800
to the attention of:
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S):

Signature: _____ Date: _____

Full name of sole or first inventor: Besma KRAIEM
Residence: Fellbach, Germany
Citizenship: Tunisian

Signature: _____ Date: _____

Full name of 2nd joint inventor (if any):

Residence:

Citizenship:

Signature: _____ Date: _____

Full name of 3rd joint inventor (if any):

Residence:

Citizenship:

[Similarly list additional inventors on separate page]

Post Office Address(es) of inventor(s):
[if all inventors have the same post office address]

SONY International (Europe) GmbH
Hugo-Eckener-Strasse 20
D-50829 Köln
GERMANY

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming [or Supporting a Claim by Another for] Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, individual Non-Inventor].

Note: A post office address must be provided for each inventor.